


SUBSTRATE

MICRO LED

MICRO DRILLING

**schmoll** asia pacific

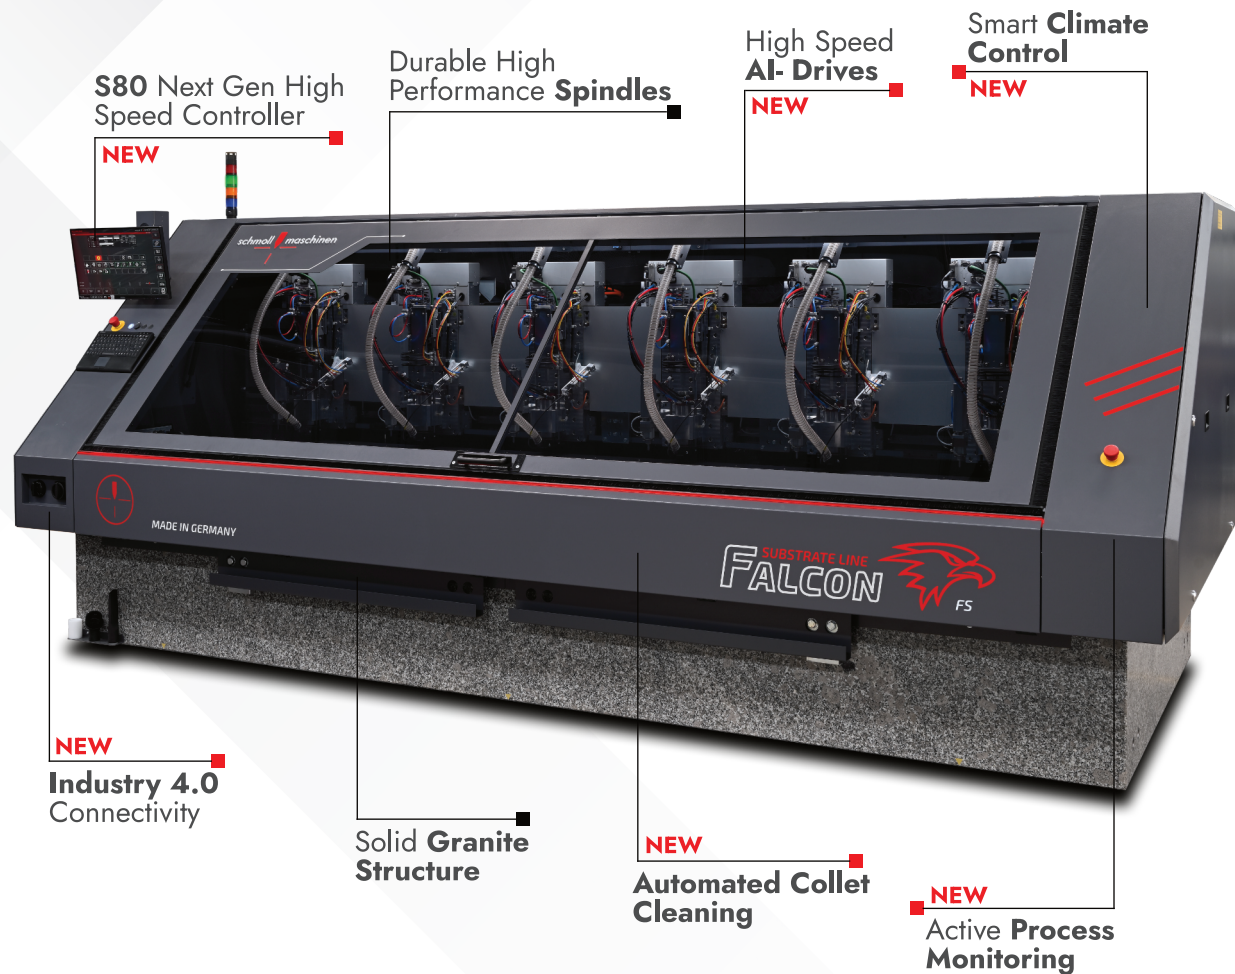

# FALCON

## Substrate Drilling Machine



## FALCON Substrate Drilling Machine

Models	FS-6-22	FT-6-22	FXY-6-22
Description	Speed Substrate Drilling	Precision Substrate Drilling	Aligned Substrate Drilling
Axis Drive Concept	Standard	Tandem Y-Axis	Multi XY
Axis Drive Speed	XY 100 m/min – Z 50 m/min	XY 100 m/min – Z 50 m/min	XY 100 m/min – Z 60 m/min
Spindles	T200 X(20-200k) full range T250 (20-250k) full range PS300 (40-300k) =< 3.2mm	T200 X(20-200k) full range T250 (20-250k) full range PS300 (40-300k) =< 3.2mm	T200 X(20-200k) full range T250 (20-250k) full range PS300 (40-300k) =< 3.2mm
Panel Size	22.5" x 27.0" (572x685 mm)	22.5" x 27.0" (572x685 mm)	22.4" x 27.0" (570x685 mm)
CCD Registration (Optional)	Not applicable	Not applicable	High Resolution Cameras
Basic Accuracy (Schmoll Standard Test)	+/- 15 µm (18 µm @ CPK 1.67)	+/- 13 µm (17 µm @ CPK 1.67)	+/- 12 µm (15 µm @ CPK 1.67)
Automation Concept (Recommended)	DTE (2 Level) or QLB (4 Level)	DTE (2 Level) or QLB (4 Level)	DTE (2 Level) or QLB (4 Level)
Weight (Net/Gross)	11,600kg/ 12,300kg	11,600kg/ 12,300kg	11,900kg/ 12,600kg
Air Consumption	Pressure 7 - 7.5 bar, Consumption l/min ( avg/max), T200X 660/825, T250 618/978, PS300 1068/1133		
Dimension (w/o Automation)	4,180 x 2,000 x 1,770 mm	4,180 x 2,000 x 1,770 mm	4,180 x 2,050 x 1,770 mm

Common Specifications	
Machine Base	Full Body Granite
Controller	S80 – Latest Technology High Performance Controller with Industry 4.0 connectivity
X/Y/Z – axis drive	AI-driven wear and maintenance free linear motor
Tooling System	Prism-Slot Tooling pin Ø 3-5mm with Online Accuracy Check (OAC)
Tool Cassette	JTC 6 x 50 tools (optional 6 x 100 ringless UT)
Contact Bit Detection (CBD)	Real time broken bit detection, Quick Drill Function, Z-stroke optimization
Pressure Foot	3 PPF (3 position pressure foot) with 2 mm, 3.6 mm or 8 mm – Easy clean function
Temperature Control	Smart Climate Control
Required Room Conditions	Room Temperature 22 +/- 1°C - Humidity 55% - 65%
Power Connection	380/400 V ± 5% (machine input power), 50/60Hz , 3 phase, avg10 kVA, max 16 kVA

### Schmoll Maschinen HQ

**Schmoll Maschinen (Germany)**  
 Odenwaldstraße 67  
 D-63322 Rödermark/Ober-Roden  
 Germany  
 ☎ +49 60 74 89 01-0  
 ✉ info@schmoll-maschinen.de  
 🌐 www.schmoll-maschinen.de

### Schmoll Asia Pacific

**SAP Hong Kong (Head Office)**  
 ☎ +852-28505909  
 ✉ sales@schmoll-asia.com  
 🌐 www.schmoll-asia.com  
**SAP Taiwan**  
 ☎ +886-3-3583808  
**SAP Dongguan**  
 ☎ +86-769-22419199  
**SAP Kunshan**  
 ☎ +86-512-57371850

**SAP Korea**  
 ☎ +82-31-4978779  
**SAP Thailand**  
 ☎ +66-2-711-7349-50  
**SAP Japan (Head Office Osaka)**  
 ☎ +81-6-6531-2127  
**SAP Malaysia**  
 ☎ +60 (0)4 588 7396



Schmoll-asia.com



Schmoll WeChat