


SUBSTRATE

MICRO LED

MICRO DRILLING

schmoll  **asia pacific**

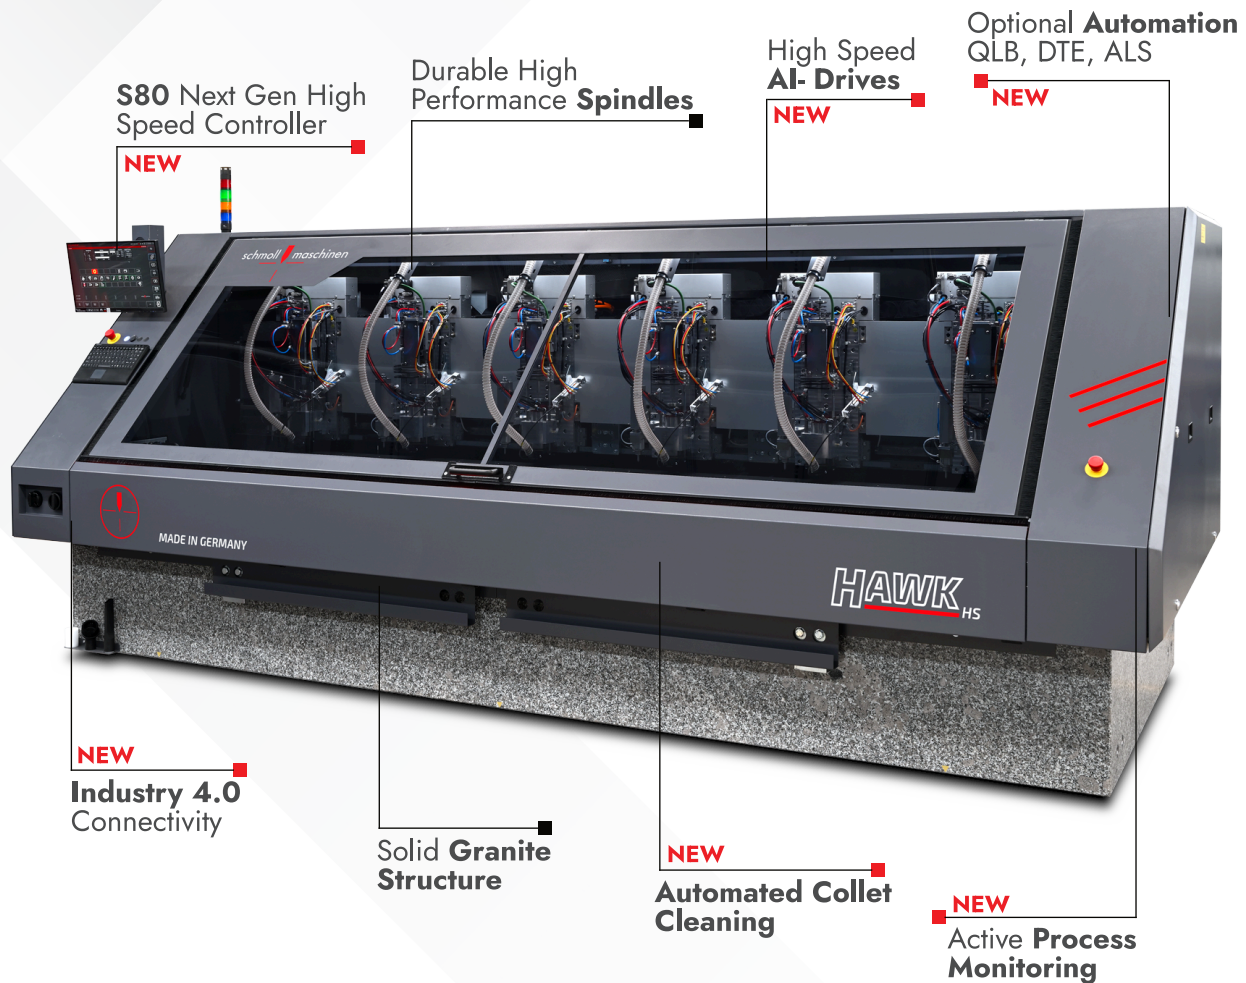

HAWK/EAGLE

Microdrilling/Depthcontrol



Hawk Models	HS-6-2228		HS-6-2528	HS-6-2532	HS-6-2643
Description	High-End Drilling		X High-End Drilling	XL High-End Drilling	XXL High-End Drilling
Spindles Choice	T160 (20-160k) full range / T200x (20-200k) full range				
X/Y – axis drive	AI-driven wear and maintenance free linear motor – 90 m/min				
Z – axis drive	Ai-driven robust AC Motor (Leadscrew) – 60 m/min				
Eagle Models	ES-6-2228	ES-6-2528	ES-6-2532	ES-6-2643	
Description	Special Application Drilling	X Special Application Drilling	XL Special Application Drilling	XXL Special Application Drilling	
Spindles	T160 (20-160k) full range / T200x (20-200k) full range / T250 (20-250k) full range				
X/Y – axis drive	AI-driven wear and maintenance free linear motor – 90 m/min				
Z – axis drive	Ai-driven wear and maintenance free linear motor – 60 m/min				
Depth Control	High precision Depthcontrol by Contact Bit Detection (CBD)				
Common Specifications					
Basic Accuracy (Schmoll Standard Test)	X/Y Axis +/- 18 µm, Cpk > 1.67				
Panel Size	22.5”x 28.7” (574x730 mm)	24.9”x 28.7” (633x730 mm)	24.9”x32.1” (633x815 mm)	26.7”x43.0” (678x1092 mm)	
	Other Panel Formats available on request				
Controller	S80 – Latest Technology High Performance Controller with Industry 4.0 connectivity				
Tooling System	Prism-Slot Tooling pin Ø 3 ~ 5mm with Online Accuracy Check (OAC)- Optional Vacuum Table				
Tool Cassette	JTC 6 x 50 tools (optional 6 x 100 ringless UT)				
Contact Bit Detection (CBD)	Real time broken bit detection, Quick Drill Function, Z-stroke optimization				
Pressure Foot Choice	3 PPF (3 position pressure foot) with 2 mm, 3.6 mm or 8 mm – Easy clean function or PFIS				
Dimensions	4183x2000x1650 mm	4560x2000x1650 mm	4560x2200x1650 mm	4815x2620x1650 mm	
Weight (net)	10,700 kg	11,200 kg	11,900 kg	13,600 kg	

Schmoll Maschinen HQ

Schmoll Maschinen (Germany)
 Odenwaldstraße 67
 D-63322 Rödermark/Ober-Roden
 Germany
 ☎ +49 60 74 89 01-0
 ✉ info@schmoll-maschinen.de
 🌐 www.schmoll-maschinen.de

Schmoll Asia Pacific

SAP Hong Kong (Head Office)
 ☎ +852-28505909
 ✉ sales@schmoll-asia.com
 🌐 www.schmoll-asia.com
SAP Taiwan
 ☎ +886-3-3583808
SAP Dongguan
 ☎ +86-769-22419199
SAP Kunshan
 ☎ +86-512-57371850

SAP Korea
 ☎ +82-31-4978779
SAP Thailand
 ☎ +66-2-711-7349-50
SAP Japan (Head Office Osaka)
 ☎ +81-6-6531-2127
SAP Malaysia
 ☎ +60 (0)4 588 7396



Schmoll-asia.com



Schmoll WeChat